

### *Bi-directional RF Remote Control application boards*

These simple application boards use firmware based on the familiar CTA88 remote control systems to implement a bi-directional control link. A system consists of a master board (which initiates communication burst cycles) and a slave (which responds to them). In hardware terms these boards are the same, but have different firmware loaded.



Figure 1: BD118 application boards

A single relay output is provided on each board, controlled by a logic (or switch) input on the "opposite" board. This product only operates in one mode: the radio link operates continuously, and the output simply reflects the state of the input ("momentary" operation).

The radio link uses a 10% duty cycle, 0.3 second burst cycle. The data format employed has an 8 bit address, which is set up on a DIP switch.

LED indicators are provided for power, relay output state and "valid communication link established". (On the "master" this LED is lit constantly if the link is functional. On the "slave" board this LED blinks on with each burst received from the master)

#### Features

- 8 bit address select switch
- A relay to control mains powered devices rated up to 8A, 240VAC
- Visual LED indication of power, valid code received and active relay
- RF module range testing
- Logic or Switch input for momentary control of relay
- Momentary relay output
- Setup is simple as Plug-and-Play

#### Kit Contents

The BD118 Application kit is supplied with the following contents:


- 1 BD188 Encoder/Decoder Master board
- 1 BD188 Encoder/Decoder Slave board
- 2 Radiometrix Transceiver module (*ordered separately*)
- 2 1/4-wavelength monopole or helical antennas
- 1 BD118 Application board manual
- 1 Data sheet of Radio module ordered

#### Additional requirement


- External power supply (24V, 12V and 5V version available)

## Features:

<b>Interfaces</b>	
<b>Output</b>	8amp 240v rated SPDT "change over" relay 3.81mm pitch 3 way 2 part "Phoenix" type terminal
<b>Input</b>	Active low logic input Pullup to 5v, and protection diodes, provided Compatible with N/O volt-free closing contact 3.81mm pitch 2 way 2 part "Phoenix" type terminal
<b>Power</b>	24v, 12v and 5v versions available 40mA max (plus relay coil current) 3.81mm pitch 2 way 2 part "Phoenix" type terminal
<b>RF</b>	SMA (or optional terminal block)
<b>Indicators</b>	
	Power on LED (red)
	Relay state LED (red)
	Valid Comms. LED (green)
<b>BD118 control chip</b>	
	Clock 10MHz (ceramic resonator)
	Data rate 3.6kbps Biphase coded burst
	Addressing User programmable 8bit address (DIP switch)
	Response time <0.5s
<b>Size</b>	
	76 x 63 x 16mm (excluding connectors) (four 3.3mm diameter mounting holes are provided)
<b>Operating temperature</b>	
	-20 to +70 degrees centigrade (some radios may be limited to -10/+55) (Storage -30 to +70 degrees)
<b>Radio modules</b>	
	Any BiM pinout transceiver (RDL2, NiM2, any BiM)

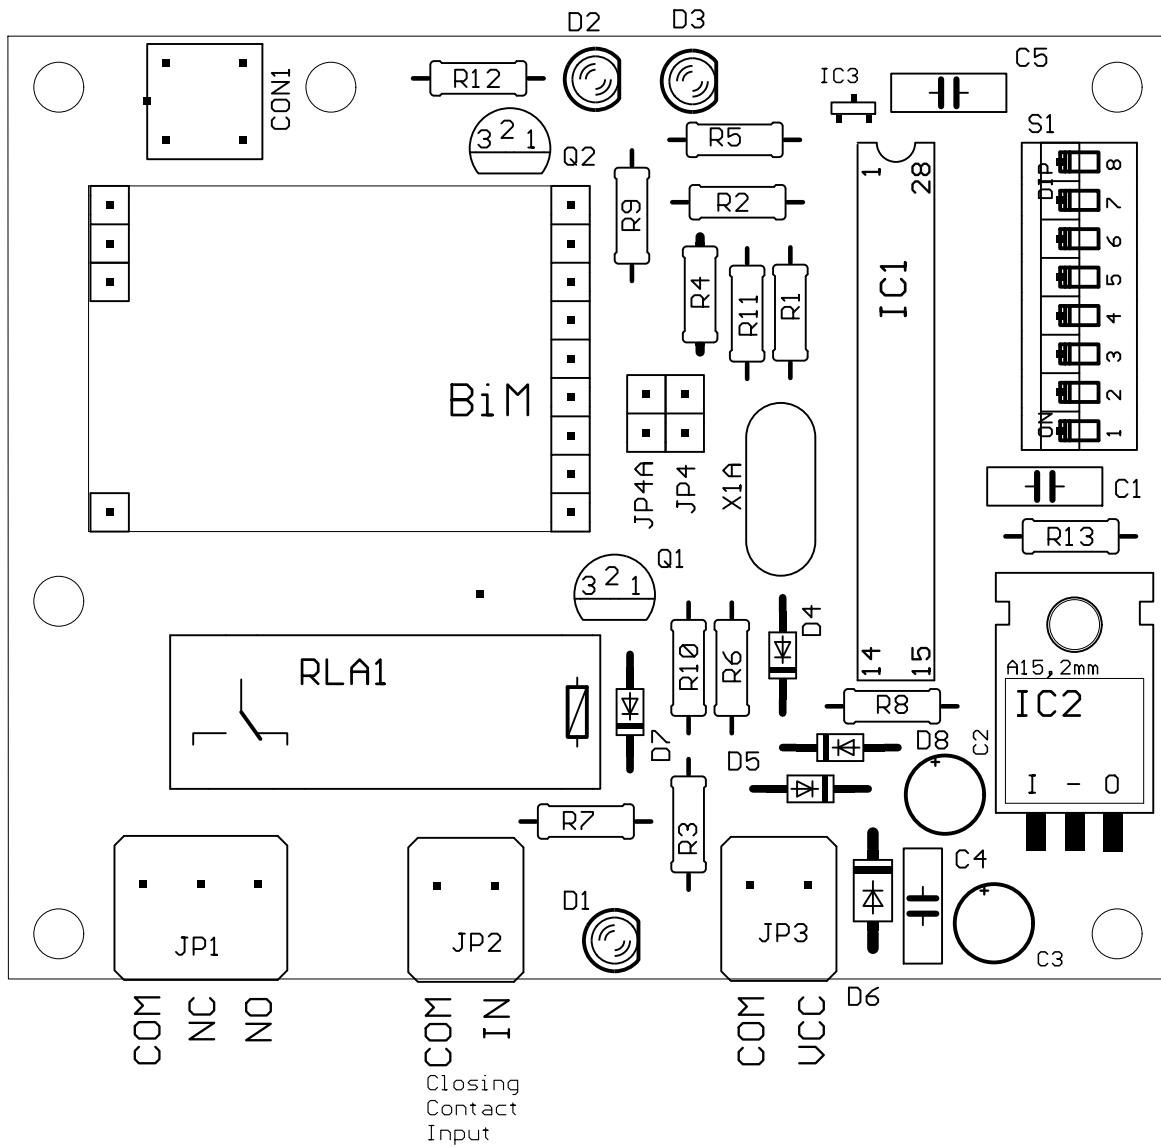

**Figure 2: BD118 Board Component Layout**

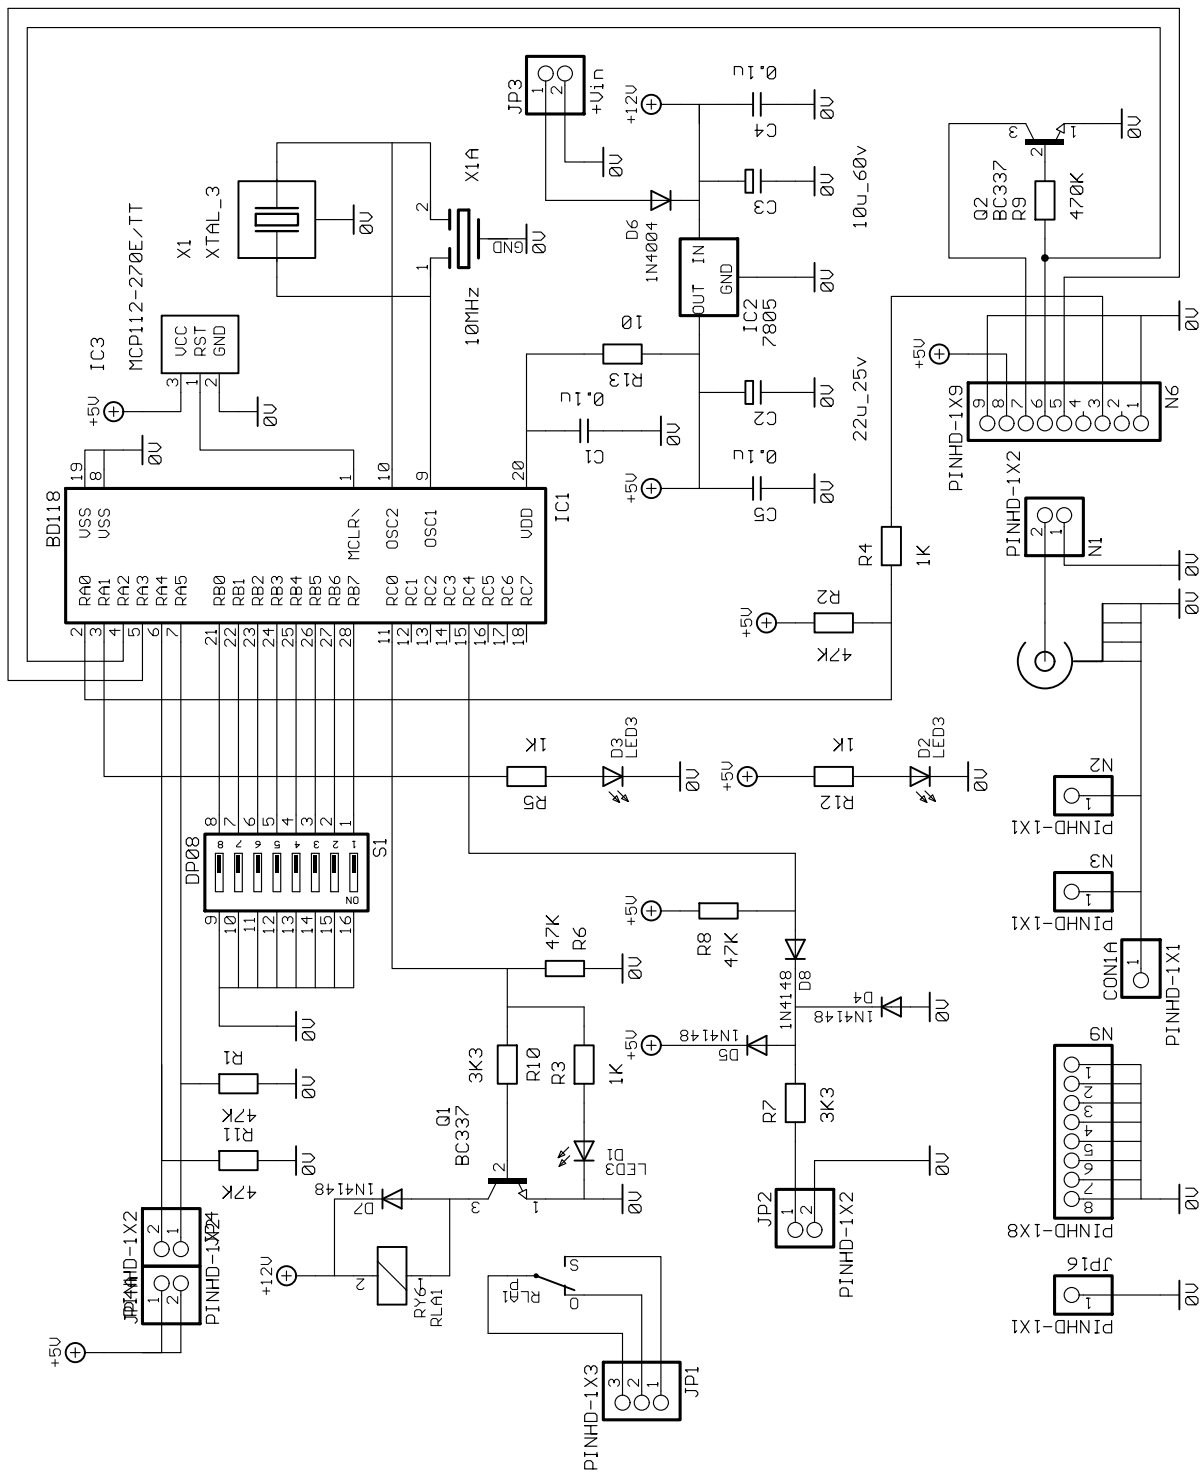

**Figure 3: BD118 Schematics**

**Radiometrix Ltd**  
Hartcran House  
231 Kenton Lane  
Harrow, Middlesex  
HA3 8RP  
ENGLAND  
Tel: +44 (0) 20 8909 9595  
Fax: +44 (0) 20 8909 2233

[sales@radiometrix.com](mailto:sales@radiometrix.com)  
[www.radiometrix.com](http://www.radiometrix.com)

### Copyright notice

*This product data sheet is the original work and copyrighted property of Radiometrix Ltd. Reproduction in whole or in part must give clear acknowledgement to the copyright owner.*

### Limitation of liability

*The information furnished by Radiometrix Ltd is believed to be accurate and reliable. Radiometrix Ltd reserves the right to make changes or improvements in the design, specification or manufacture of its subassembly products without notice. Radiometrix Ltd does not assume any liability arising from the application or use of any product or circuit described herein, nor for any infringements of patents or other rights of third parties which may result from the use of its products. This data sheet neither states nor implies warranty of any kind, including fitness for any particular application. These radio devices may be subject to radio interference and may not function as intended if interference is present. We do NOT recommend their use for life critical applications.*

*The Intrastat commodity code for all our modules is: 8542 6000*

### R&TTE Directive

*After 7 April 2001 the manufacturer can only place finished product on the market under the provisions of the R&TTE Directive. Equipment within the scope of the R&TTE Directive may demonstrate compliance to the essential requirements specified in Article 3 of the Directive, as appropriate to the particular equipment.*

*Further details are available on The Office of Communications (Ofcom) web site:*

*<http://www.ofcom.org.uk/radiocomms/ifi/>*

*Information Requests  
Ofcom  
Riverside House  
2a Southwark Bridge Road  
London SE1 9HA  
Tel: +44 (0)20 7981 3000  
Fax: +44 (0)20 7981 3333  
[information.requests@ofcom.org.uk](mailto:information.requests@ofcom.org.uk)*

*European Radiocommunications Office (ERO)  
Peblingehus  
Nansensgade 19  
DK 1366 Copenhagen  
Tel. +45 33896300  
Fax +45 33896330  
[ero@ero.dk](mailto:ero@ero.dk)  
[www.ero.dk](http://www.ero.dk)*